



*The lightweight,  
powerful,  
space creating  
gas heating solution  
for the RV market*



- Suitable for caravans, motorhomes and camper vans
- Compact, space saving heating solution with narrow rotatable design
- Installed underfloor, maximising valuable living and storage space
- Enjoy the great outdoors all year round with total comfort day and night
- At the beach or on the mountain top, use Whale Heat Air anytime and in any season
- Easy to use, intuitive control panel

### More for the manufacturer...



**Less Weight**  
Compact and lightweight design



**More Space**  
Increased bunk space, full length wardrobes and longer beds



**Design Freedom**  
Customisable installation creating a blank canvas for vehicle designers



**Connectivity**  
CI-BUS control compatibility



**More Options**  
Wide range of models with efficient performance to maximise comfort

### More for the user...



Fast heat up and fully automatic output modulation for enhanced user comfort



Quiet night time operation for when you need it most



Cosy van all year round



Even and well maintained heat distribution




Easy to use, no fuss controls

## Technical Specifications











		<b>HEAT AIR 4 G</b>	<b>HEAT AIR 5 G</b>
<b>Conformity</b>	CE	0086/11	
	ECE R122	E13 122R - 000174	
	ECE R10	E11 10R-10791*00	
	Ingress Protection	IP 45	
<b>Gas</b>	Type	Butane/Propane 30mbar - CAT I <sub>3B/P(30)</sub>	
	Heat Output [kW]	1.4, 2.8, 4.1	1.6, 4.0, 5.0
	Consumption [g/h]	109, 233, 342	131, 342, 436
<b>Electric 12V DC</b>	Voltage [V]	10.1 to 15.9	
	Current Draw Range [A]	0.6 - 3.3	0.6 - 6.5
	Current Draw Average [A]	1.4	1.1
	Standby* [A]	0.008	
	Rated Fuse Size [A]	10	
<b>Temperature</b>	Storage [°C]	-40 to +70	
	Operation [°C]	-20 to +50	
	Control [°C]	+5 to +32	
<b>Physical</b>	Dimensions L x W x H [mm]	469 x 165 x 175	
	Weight [kg]	5.5	5.9
	Max Air Flow @ 0.5mbar [m <sup>3</sup> /h]	150	220
	Altitude Range** [m]	0 - 2750	

\*Standby Current Draw for Heater only \*\*Output of heater may be limited at higher altitude depending on ambient and operating conditions.

### Whale Heat Control Panel




← 68.75mm →

-  Gas heating button
-  Gas heating standby
-  Gas heating on
-  Adjust temperature
-  Night time setting (approx. 16°C)
-  Frost setting (approx. 5°C)
-  External control standby
-  External control active
-  Lock out indicator
-  Reset button

### Typical Underfloor Installation

- A Blown air intake
- B Combustion air intake
- C Exhaust pipe
- D Blown air outlet
- E Gas supply

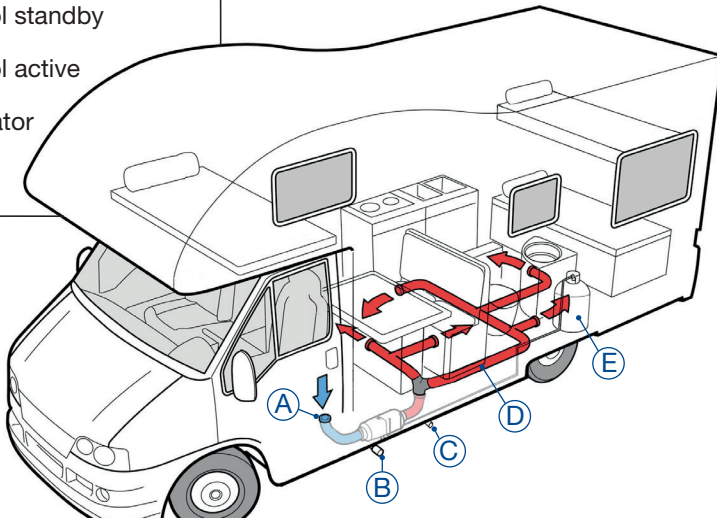

- LIN protocol
- CI-BUS control compatibility
- Easy to use, intuitive design
- Low profile & compact
- Modern capacitive touch technology
- Discrete LED auto dim
- High quality UV resistant polymer

Whale Support

Tel: 0845 217 2933 info@whalepumps.com www.whalepumps.com



©Copyright Whale 2019 - All rights reserved. Reproduction in whole or in part without permission is prohibited.

WHALE® is a registered trademark of Munster Simms Engineering Limited, Bangor, Northern Ireland trading as Whale. Whale's policy is one of continuous improvement and we reserve the right to change specifications without prior notice. Illustrations are for guidance purposes only.

Neither the accuracy nor completeness of the information contained in this or any product literature is guaranteed by the Company and may be subject to change at its sole discretion.